

# PHSZ/PH2不銹鋼泵浦

## PHSZ

2531A.B  
2533A.B  
4031A.B  
4033A.B  
7533A.B

A = 50HZ · B = 60HZ



## PH2

PH2-3/3AS5.4  
PH2-3/3AT5.4  
PH2-3/3AT5.7  
PH2-2/2AS6.4  
PH2-2/2AT6.4  
PH2-2/2AT6.7



A = Series

S = 110V · T = 220V

5 = 50HZ · 6 = 60HZ

4 = 400W(Output)



7 = 750W(Output)

### 應用範圍

- 冷熱水循環(0~80°C)
- 超音潔洗淨設備

### 泵浦特點

- 全閉式外扇冷卻馬達
- PH2為高揚程型
- PHSZ為大流量型
- 接液部為全不銹鋼板沖壓製品，並搭配耐磨SIC軸封，效率高，噪音低，應用範圍廣

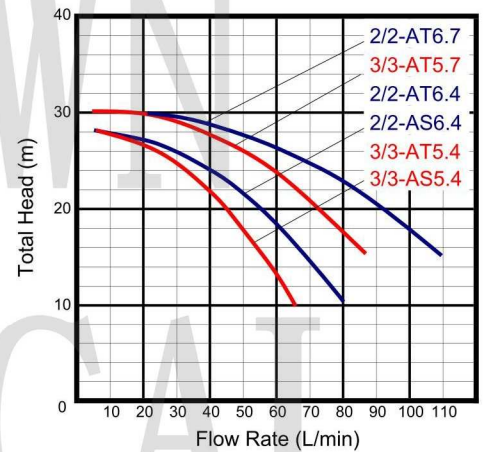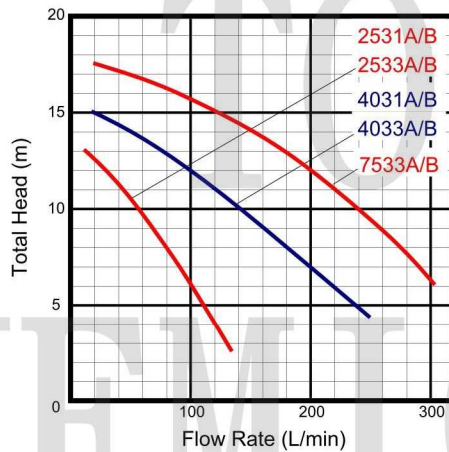

■ 型號末碼：1表示單相電 · 3表示3相電

(50 / 60HZ)

Model	Item	Frequency	Reted Output	Reted Voltage	Diameter	Flow Rate	Total Head	Reted Consumption	Reted Current	Motor Protector	Weight
		HZ	W	V	A (mm)	L / min	m	W	A		kg
PHSZ-2531A · B		50/60	250	110	25 (1B)	34 · 62	12 · 9	400	5.8	Manual	12.1
PHSZ-2533A · B		50/60	250	220	25 (1B)	34 · 62	12 · 9	400	1.6	Manual	11.1
PHSZ-4013A · B		50/60	400	110	40 (1½B)	80 · 150	12 · 9	700	8.6	Manual	13.2
PHSZ-4033A · B		50/60	400	220	40 (1½B)	80 · 150	12 · 9	670	3.0	Manual	12.5
PHSZ-7533A · B		50/60	750	220	40 (1½B)	190 · 270	12 · 9	1100	4.5	Manual	13.2
PH2-3/3AS 5.4		50	400	110	25	35 · 50	23 · 18	601	7.5	Manual	14.9
PH2-3/3AT 5.4		50	400	220	25	35 · 50	23 · 18	550	2.3	Manual	14.2
PH2-3/3AT 5.7		50	750	220	40	65 · 80	23 · 18	700	3.5	Manual	15.0
PH2-2/2AS 6.4		60	400	110	25	40 · 60	23 · 18	700	7.8	Manual	14.2
PH2-2/2AT 6.4		60	400	220	25	40 · 60	23 · 18	601	2.2	Manual	13.5
PH2-2/2AT 6.7		60	750	220	40	80 · 100	23 · 18	901	3.6	Manual	14.3